



TEMPORARY STREAM CROSSING PLAN

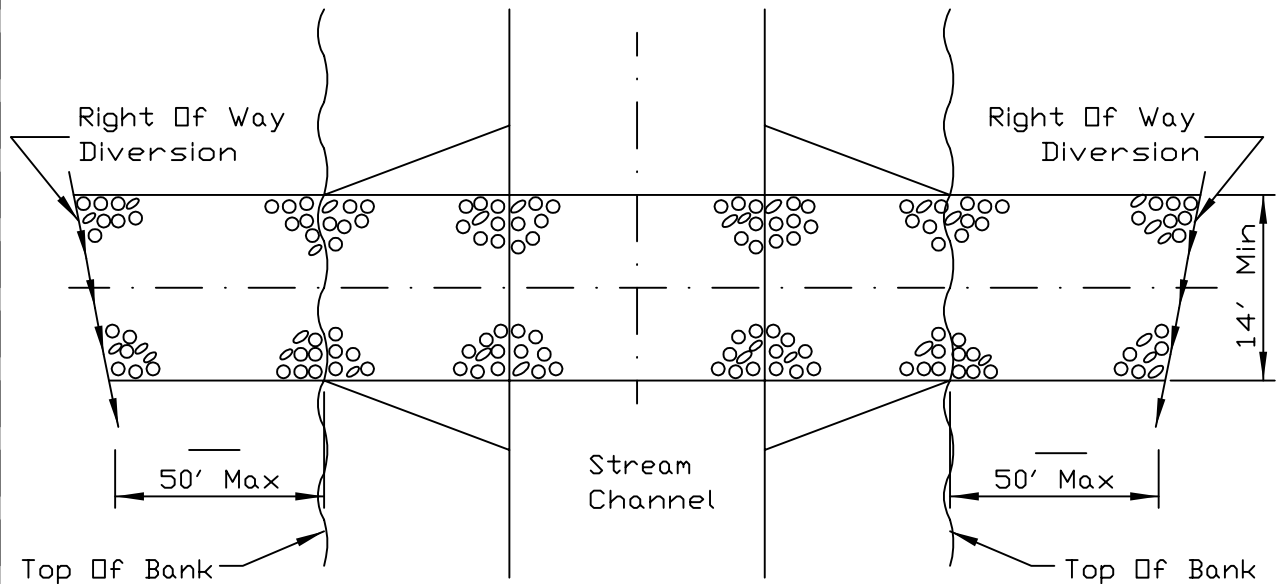

PLAN VIEW

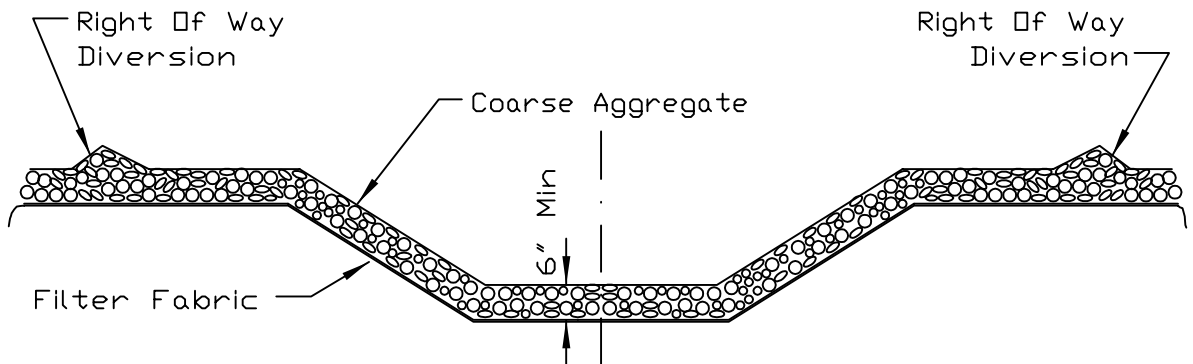

SECTION

NOTES:

1. Filter fabric shall meet the requirements of material specification 592 GEOTEXTILE, Table 1 or 2, Class I, II or IV and shall be placed over the cleared area prior to the placing of rock.
2. Rock or reclaimed concrete shall meet one of the following IDOT coarse aggregate gradation, CA-1, CA-2, CA-3 or CA-4 and be placed according to construction specification 25 ROCKFILL using placement Method I.
3. The stream crossing shall be made as perpendicular to the centerline of the stream as possible.
4. The crossing shall be removed immediately when no longer needed and the stream channel restored to its original cross section.

| | |
|-----------|------------------|
| REFERENCE | |
| Project | _____ |
| Designed | _____ Date _____ |
| Checked | _____ Date _____ |
| Approved | _____ Date _____ |



| |
|-------------------|
| STANDARD DWG. NO. |
| IL-675 |
| SHEET 1 OF 1 |
| DATE 4-1-94 |